
Experience Carpet Tiles





Strobe

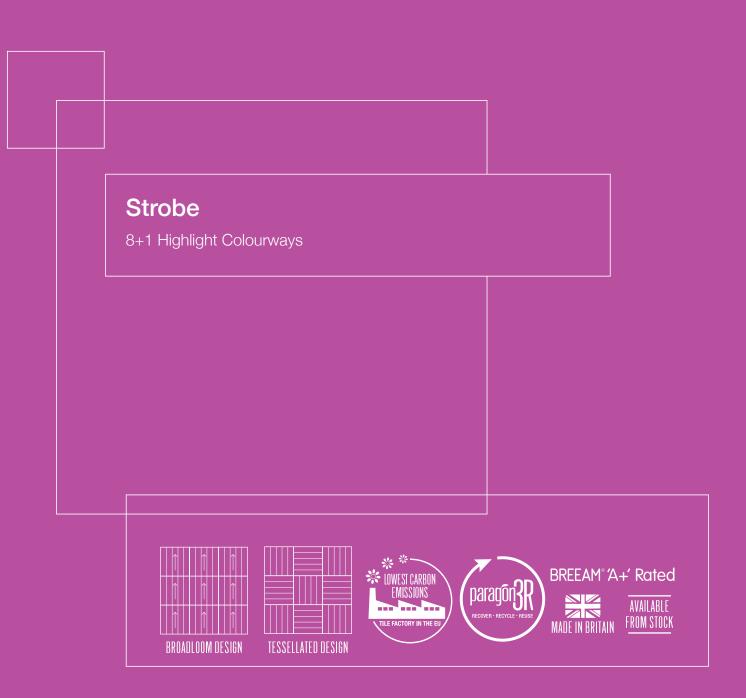

8+1 Highlight Colourways

Suitable for office, commercial, retail, schools, colleges, and leisure Heavy Contract 100% Solution Dyed Nylon / Space Dyed Nylon 10 year Warranty Available in 8 Linear designed colourways

+ 1 Fusion Grey Accent Colour 610 gsm (Grey Fusion 580gsm)

Pile Yarn Weight

BREEAM 'A+' Rated Total recycled content of up to 50%





Style	1/10" gauge
Yarn Construction	Solution Dyed / Space Dyed
Pile Yarn Weight	610 gsm (Grey Fusion 580gsm)
Pile Height	3mm
Total Weight	4400 gsm
Total Thickness	6mm
Backing	100% Envirobase - minimum of 75% recycled material
Additional Backing	100% Komfort Bac available on request
Dimensions	50cm x 50cm
Wear Classification	Heavy Contract Class 33
Luxury Class	LC1
Anti-static	< 2kV body voltage
	Suitable for use with computers
Colour Fastness	To Light (ISO105 – BO2) > 6
	To Water (ISO 105 - E01) > 5
	To Rubbing (ISO 105 - E01) > 5 To Rubbing (ISO 105 - X12) > 5 dry 4-5 wet
Flammability	
Flammability	To Rubbing (ISO 105 - X12) > 5 dry 4-5 wet
Flammability Castor Chair Test	To Rubbing (ISO 105 - X12) > 5 dry 4-5 wet BS 4790 Low radius of char
	To Rubbing (ISO 105 - X12) > 5 dry 4-5 wet BS 4790 Low radius of char BS EN 13501-1 Bfl-s1
Castor Chair Test	To Rubbing (ISO 105 - X12) > 5 dry 4-5 wet BS 4790 Low radius of char BS EN 13501-1 Bfl-s1 BS EN 985 continuous use



 Farfield Park
 T.
 +44 (0) 1709 763 839


 Manvers
 F.
 +44 (0) 1709 763 813

 Wath-upon-Dearne
 E.
 sales@paragon-carpets.co.uk

 Rotherham, S63 5DB
 W.
 www.paragon-carpets.co.uk

E. sales@paragon-carpets.co.uk



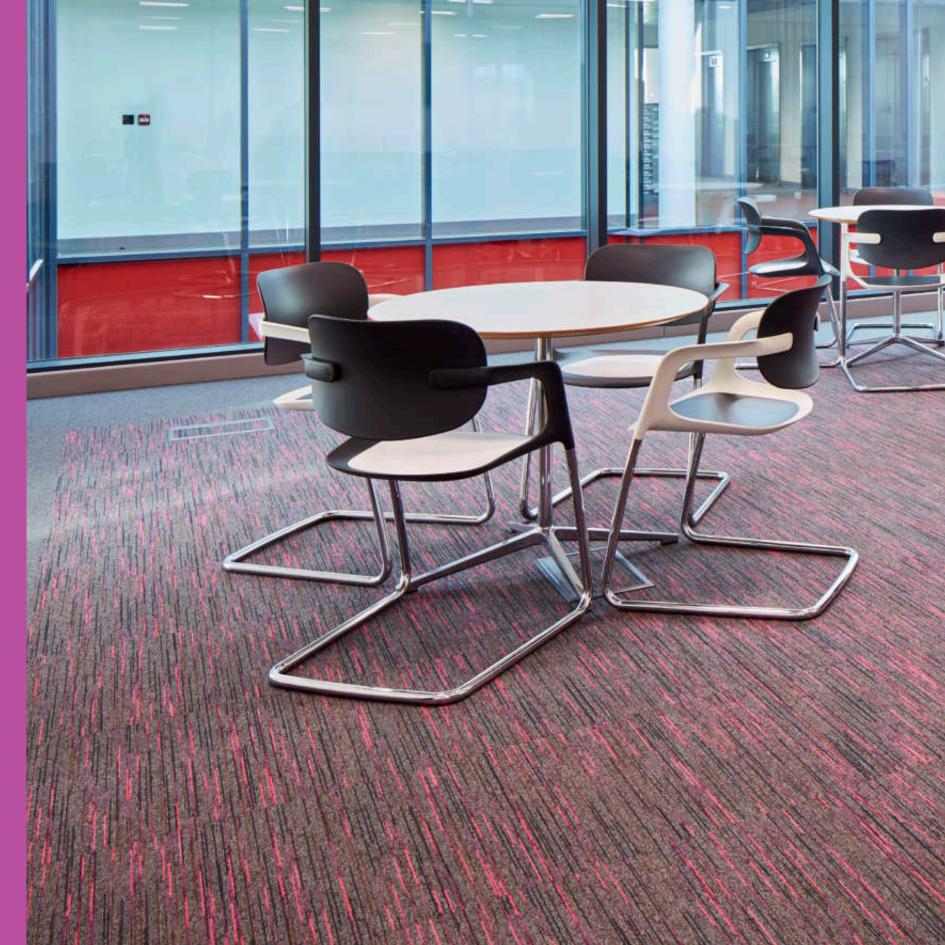








Spark 2621 (LRV - Y4.57)



Flex 2620 (LRV - Y4.97)



lgnite 2603 (LRV - Y6.09)



Plasma 2619 (LRV - Y4.29)



Blaze 2604 (LRV - Y4.24)



Rapid 2614 (LRV - Y5.53)



Extreme 2606 (LRV - Y5.11)



Force 2605 (LRV - Y7.47)



Grey Fusion Highlight (Accent colour for all colourways) (LRV - Y4.69)

INSTALLATION

Sub floors should be clean, dry and flat and prepared in accordance with BS5325. Timber floors should be covered with plywood or other appropriate sheet materials. For tiles use F Ball tackifier F41 or Laybond 79. Tiles may be laid tessellated or broadloom. Tiles should be allowed to condition for a minimum of 24 hours at the expected temperature and humidity prevailing when the building is in use. Further installation information is available from the Paragon Sales Office.

COLOUR

For technical reasons, as with all textile materials, it may not be possible to colour match from different batches. Orders requiring colour match should be placed at the same time. Production may therefore show variations to the sample card.

MAINTENANCE

It is recommended that a maintenance schedule be initiated from the date of installation to achieve maximum life expectancy of the product. Regular vacuum cleaning with a twin motored upright vacuum cleaner is essential. All spillages and stains should be attended to immediately. For detailed information, please consult the Paragon cleaning and maintenance guide. It is imperative that all internal carpets are well protected from outside soiling and moisture by the use of barrier matting such as MatWorks, also available from Paragon.



Farfield Park Manvers Wath-upon-Dearne Rotherham, S63 5DB T. +44 (0) 1709 763 839
F. +44 (0) 1709 763 813
E. sales@paragon-carpets.co.uk
W. www.paragon-carpets.co.uk


 545333
 EM 14041:2004

 Product Type
 EMS 506740


 Bilgoperines:
 MPD

 Sigperines:
 MPD



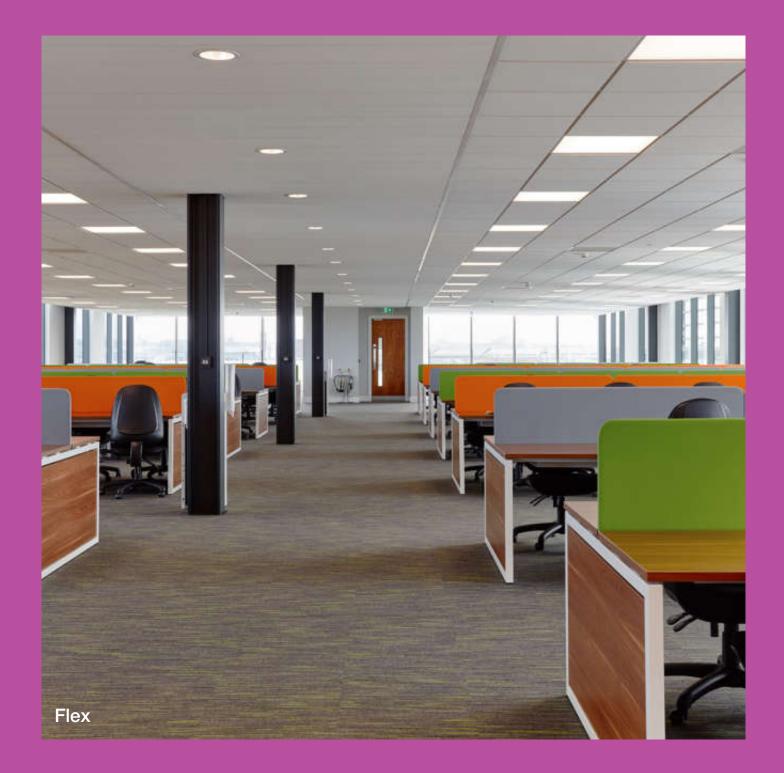



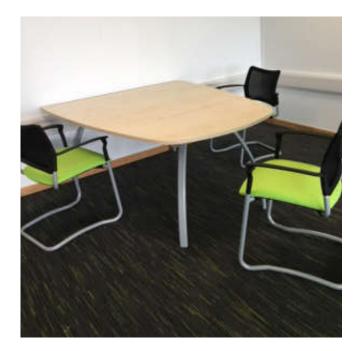









Experience Carpet Tiles



Strobe

8+1 Highlight Colourways

A Division of National Floorcoverings Ltd. Farfield Park, Manvers, Wath-upon-Dearne, Rotherham, S63 5DB T. +44(0) 1709 763839 Samples Department: +44(0) 1709 763805. Order Free Samples Online E. samples@paragon-carpets.co.uk www.paragon-carpets.co.uk | www.mat-works.co.uk



i colour wheel www.paragon-app.com





AVAILABLE



Download our free apps NOW

Search Paragon Carpets

