



Polyflor Ltd

Homogeneous Flooring

Prestige PUR

Polyflor Ltd., Leicester Rd, Whitefield,
Manchester M45 7NG, United Kingdom



Homogeneous Flooring
Prestige PUR

EPD Verification and LCA Details



| | |
|-------------|----------------|
| EPD Scope | Cradle to Gate |
| EPD Number | PLF HP2 2021EP |
| Issue Date | 10 August 2021 |
| Valid Until | 10 August 2026 |



Demonstration of Verification

CEN standard EN 15804 serves as the core Product Category Rules (PCR)

Independent external verification of the declaration and data, according to ISO 14025:2010

- External  10th Aug 2021 Third Party Verifier^a Shloka Ashar, Sustainability Consultant
LCA Reviewed by Shloka Ashar, Sustainability Consultant
- Internal  22/09/21 EPD Reviewed by David Baggs, Global GreenTag Pty Ltd

a: Optional for business-to-business communication; mandatory for business-to-consumer communication (see EN ISO 14025:2010, 9.4)

The EPD is property of declared manufacturer. Different program EPDs may not be comparable as e.g., Australian transport is often more than elsewhere. Comparability is further dependent on the product category rules used and the source of the data. Further explanatory information is found at info@globalgreentag.com or contact: certification1@globalgreentag.com.

This EPD discloses potential environmental outcomes compliant with EN 15804 for business-to-business communication.

LCIA results are relative expressions that do not predict impacts on category endpoints, exceeding of thresholds, safety margins or risks.

| EPD Program Operator | LCA and EPD Producer | Declaration Owner |
|---|--|--|
| Global GreenTag Pty Ltd PO Box 311 Cannon Hill, QLD 4170 Phone: +61 (0)7 33 999 686 http://www.globalgreentag.com | The Evah Institute Division of Ecquate Pty Ltd PO Box 123 Thirroul NSW Phone: +61 (0)7 5545 0998 http://www.evah.com.au/ | Polyflor Ltd PO Box 3, Radcliffe New Road Whitefield, Manchester M45 7NR UK Phone: + 0161 767 1111 http://www.polyflor.com |





Product Information

| | | | |
|---|---|--------------------------------|---------------------------------|
| Product name | Polyflor Homogeneous flooring | | |
| Product codes | Prestige PUR | | |
| Declared Unit | The declared product per kilogram | | |
| Product Specifications | Homogeneous 2.0mm gauge flooring. | | |
| Standards | ISO 10581: 2019 Resilient floor coverings – Homogeneous polyvinylchloride floor covering - Specifications | | |
| Manufacture site & warranty | Polyflor Ltd., Leicester Rd, Whitefield, Manchester M45 7NG, United Kingdom 10 years | | |
| Representation Site & Geography | United Kingdom, Europe, Pacific Rim and Australasia. | | |
| Functional & Technical Performance | Property | Conformance to Standard | Prestige PUR |
| | Reaction to Fire | EN 13501-1 Class | Bfl-S1 |
| | Use Area | EN 685/ISO 10874 | 23, 34 & 43 |
| | Slip Resistance | DIN51130 | R9 |
| | VOC Emissions | Indoor Air Comfort AgBB/ABG | Eurofins Gold certified Pass |
| Data quality, range & variability | Cut-off criteria and data quality complies with EN 15804 Significant differences of average LCIA results are declared | | |
| Primary Data | Data was collected in accordance with EN ISO 14044:2006, 4.3.2, from primary sources including the manufacturer, suppliers and their publications on standards, locations, logistics, technology, market share, management systems and commitments to improved environmental performance. | | |
| No Chemicals of Very High Concern | Contains no substances in the “Authorised or Candidate Lists of Substances of Very High Concern (SVHCs)” with the European Chemicals Agency | | |



Program Description

| | |
|--------------------------------|---|
| EPD type | Cradle to gate (A1 to A3) |
| System boundary | The system boundary with nature includes material and energy system input processing plus manufacture and transport to factory gate plus waste arising. |
| Service Life | The reference service life is unspecified for cradle to gate scope |
| Comparability | Construction product EPDs may not be comparable if not EN15804 compliant |
| Stages included | A1, A2, A3 as depicted and denoted by x in Figure 1 |
| Stages excluded | A4-5, B1-7, C1-1& D as depicted and denoted by MND in Figure 1 |
| Product stages included | <p>Stages are included from A1 raw material acquisition, extraction, refining and processing plus reuse of scrap or material from previous systems; electricity generated from all sources with extraction, refining & transport; plus, secondary fuel energy and recovery processes.</p> <p>Also, A2 transport internal and to the factory gate as well as A3 manufacture of product packaging, inputs, ancillary material and system flows leaving at end-of-waste boundary as coproducts</p> |

Information Modules

As Figure 1 shows an x marking LCA and EPD results to be shown summed for modules A1-3. Modules A4 to C4 and D are not declared marked MND which does not indicate zero inventory or impact.

| Model Phase | Actual | | | Scenarios | | | | | | | | | | | Potential | | | | |
|-----------------|-----------------|-----------|---------------|-----------|--------------|-----------------|----------|--------|---------|-----------|------------------|-----------------|-------------|-----------|---------------|----------|-----------------|----------|-----------|
| | Produce | | | Construct | | Building Fabric | | | | | Building Use | | End of life | | | | Beyond Boundary | | |
| Module | A1 | A2 | A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 | D1, D2 | D3 | |
| Unit Operations | Resource supply | Transport | Manufacturing | Transport | Construction | Use | Maintain | Repair | Replace | Refurbish | Operating Energy | Operating Water | Demolish | Transport | Process Waste | Disposal | Reuse | Recovery | Recycling |
| Cradle to Gate | x | x | x | MND | MND | MND | MND | MND | MND | MND | MND | MND | MND | MND | MND | MND | MND | MND | MND |

Figure 1 Life Cycle Phases and Declared Stages in Cradle to Grave Boundary



Base Material Origin and Detail

Table 1 lists product composition by function, component, source and mass share amount.

| Function | Component | Source | Polyflor Prestige PUR |
|-------------|------------------------|------------|-----------------------|
| Binder | PVC | EU & UK | >46<49 |
| Filler | Limestone | UK | >30<33 |
| Plasticiser | Diocetyl Terephthalate | Sth. Korea | >15<17 |
| Plasticiser | Epoxidised esters | UK | >2<4 |
| Whitening | Titania | EU | >2<4 |
| Coating | Polyurethane | UK | >0.3<1 |
| Stabiliser | Barium Zinc Soap | UK | >0.3<1 |
| Various | Soap, ester, pigment | Global | >0.3<1 |



Homogeneous Flooring
Prestige PUR

Scope and System Boundary

Figure 2 shows included processes in a cradle to gate system boundary and dashed lines defining excluded scenarios to end of life fate to recycling or to landfill grave.

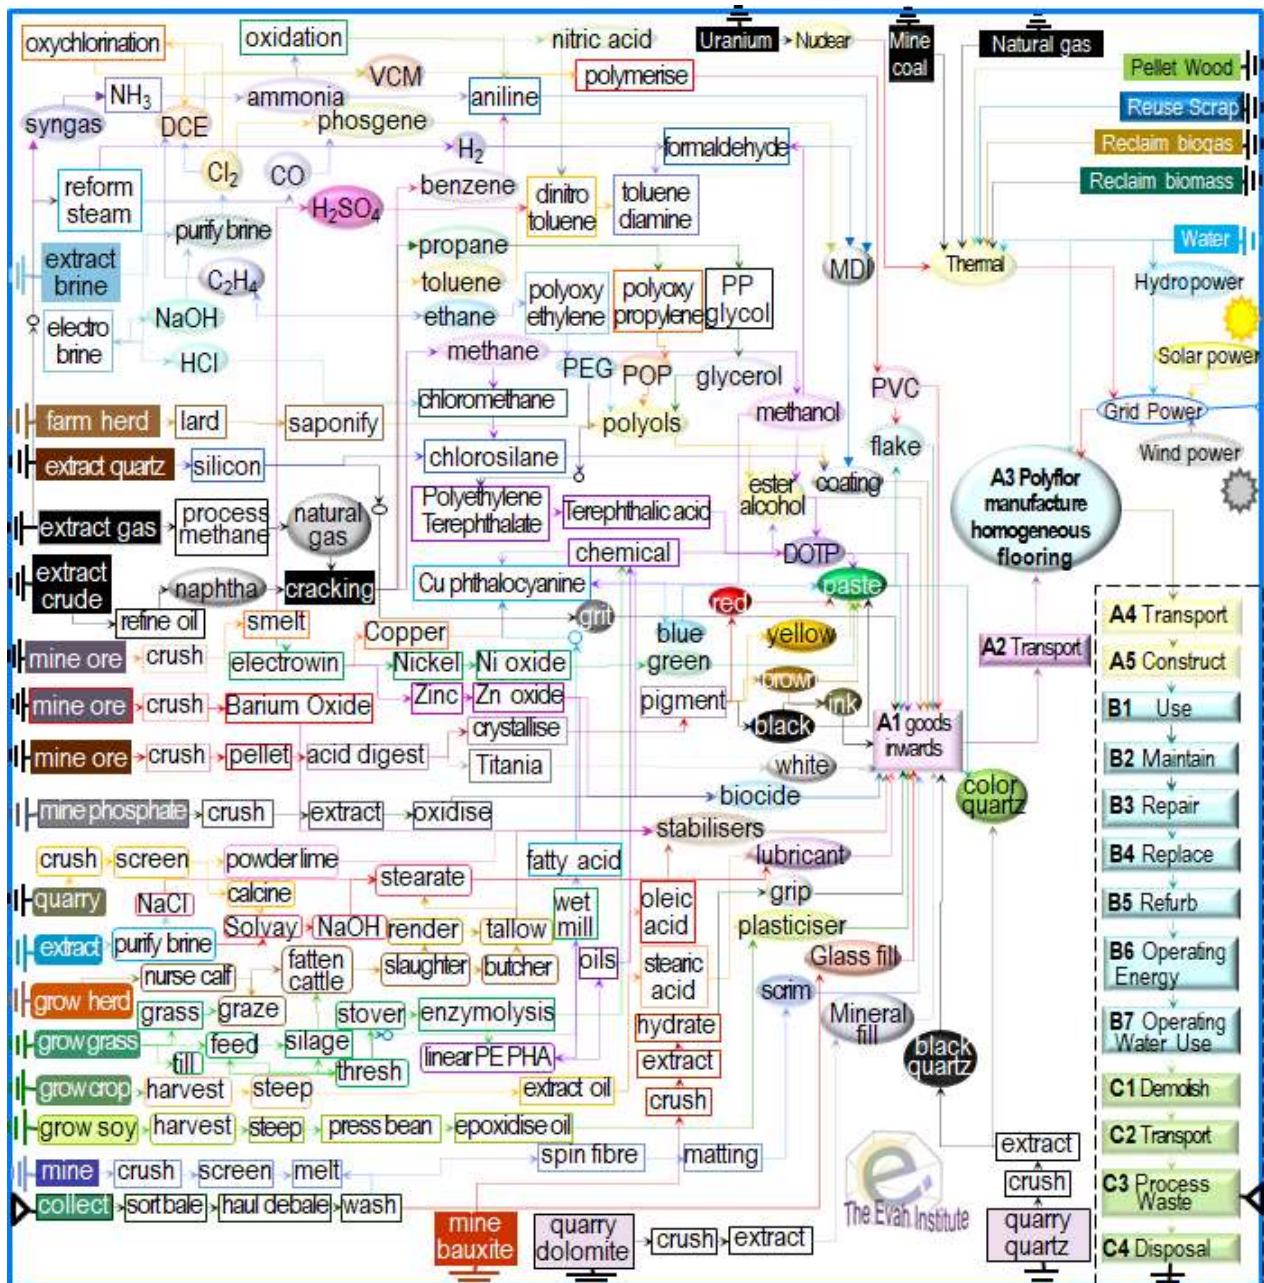


Figure 2 Process Flow Chart Cradle to Gate scope inside Cradle to Grave System Boundary



Environmental Impact Terminology

Environmental impacts contributing to risks of social and ecological issues and collapse are tabled below with **common names** and remedies given for each indicator listed in subsequent results tables.

| | |
|---|--|
| <p>Global warming potential</p> | <p>Greenhouse gases absorb infra-red radiation. This heat reduces thermal energy differentials, from equator to poles, forcing ocean current and wind circulation to blend and regulate climate. Weakly blended “lumpier” weather has more frequent, extreme heat wave, wildfire, cyclone, storm, flood and blizzard events. Accumulation of carbon dioxide, natural gas methane, nitrous oxides and volatile organic compounds from burning fossil fuels causes global warming. Forest and wilderness growth absorbing air-borne carbon in biomass can drawdown such accumulation. Urgent renewable energy reliance is vital in time to avoid imminent tipping points and the worsening “climate emergency”.</p> |
| <p>Ozone depletion potential</p> | <p>Stratospheric ozone loss weakens the planet’s solar shield so more shorter wavelength ultraviolet (UVB) light reaching earth damages plants and increases malignant melanoma and skin cancer in humans and animals. Chlorofluorocarbons, hydrochlorofluorocarbons (HCFC), chlorobromomethane, hydrobromofluorocarbons, carbon tetrachloride, methyl chloroform, methyl bromide and halon gas cause ozone layer loss. To repair the “ozone hole” reliance on ozone-safe refrigerants, aerosols and solvents is essential to avoid further its depletion and enable accumulation of naturally-formed ozone</p> |
| <p>Acidification potential of land and water</p> | <p>Acidification reduces soil and waterway pH, impedes nitrogen fixation vital for plant growth and inhibits natural decomposition. It increases rates and incidence of fish kills, forest loss and deterioration of buildings and materials. Chief synthetic causes of “acid rain” are emissions of sulphur and nitrogen oxides, hydrochloric and hydrofluoric acids and ammonia from burning fossil fuels polluting rain and snow precipitation world-wide.</p> |
| <p>Eutrophication potential</p> | <p>Eutrophication from excessively high macronutrient levels added to natural waters promotes excessive plant growth that severely reduces oxygen, water and habitat security for aquatic and terrestrial life across related ecosystems. Chief synthetic cause of “algal blooms” is nitrogen (N, NO_x, NH₄) and phosphorus (P, PO₄³⁻) in rain run-off across over-fertilised land catchments.</p> |
| <p>Photochemical ozone creation potential</p> | <p>Tropospheric photochemical ozone, called “smog” near ground level, is created from natural and synthetic compounds in UV sunlight. Low concentration smog damages vegetation and crops. High concentration smog is hazardous to human health. Chief synthetic causes are nitrogen oxides, carbon monoxide and volatile organic compounds (VOC) pollutants. Avoiding reliance on dirtiest coal fuel and volatile chemicals has reduced smog incidence in many areas globally.</p> |
| <p>Abiotic depletion potential elemental</p> | <p>Abiotic depletion of finite mineral resources increases time, effort and money required to obtain more resources to the point of extinction of naturally viable reserves. This limits future accessibility to vital technical, medicinal and chemical resources. The youth movement “extinction rebellion” calls on adults to secure ore reserves, biodiversity and climate for current and future generations.</p> |
| <p>Abiotic depletion potential fossil fuel</p> | <p>Abiotic depletion of resources by consuming finite oil, natural gas, coal and nuclear fossil fuel reserves leaves current and future generations suffering limited available, accessible, plentiful, essential valuable as well as scarce raw material, medicinal, chemical, fuel and feedstock. Approaching “peak oil” acknowledges fossil fuel reserves are finite and the need for decision-makers to act to avoid market instability, insecurity and or oil and gas wars.</p> |



Cradle to Gate Inventory Results

Table 2 shows inputs, outputs and potential impacts per declared unit.

Table 2 Resource Amounts A1-A3 /kg

| Inventory Input Categories | Unit | Polyflor Prestige PUR |
|--|-----------------------------------|-----------------------|
| Net Fresh Water | m ³ | 0.17 |
| Secondary Material | kg | 1.9E-02 |
| Secondary Renewable Fuel | MJ _{ncv} | 0.E+00 |
| Secondary Non-Renewable Fuel | MJ _{ncv} | 0.23 |
| Primary Renewable Energy Not Feedstock | MJ _{ncv1} | 8.8 |
| Primary Renewable Feedstock Material | MJ _{ncv} | 0.35 |
| Primary Renewable Energy Resources | MJ _{ncv} | 9.1 |
| Primary Finite Energy Not Feedstock | MJ _{ncv} | 35 |
| Primary Non-renewable Feedstock Energy | MJ _{ncv} | 18 |
| Total Primary Non-renewable Energy Use | MJ _{ncv} | 53 |
| Inventory Output Categories | | |
| Hazardous Waste Disposed | kg | 6.4E-03 |
| Non-hazardous Waste Disposed | kg | 0.27 |
| Radioactive Waste Disposed | kg | 6.5E-10 |
| Components for Reuse | kg | 0.27 |
| Material for Recycling | kg | 1.4E-02 |
| Material for Energy Recovery | kg | 2.5E-03 |
| Exported Electrical Energy | MJ _{ncv} | 0.E+00 |
| Exported Thermal Energy | MJ _{ncv} | 0.E+00 |
| Life Cycle Impact Categories | | |
| Global Warming | kg CO _{2e} | 2.0 |
| Stratospheric Ozone Depletion | kg R11 _e | 7.8E-10 |
| Photochemical Ozone Creation | kg C ₂ H _{4e} | 8.1E-03 |
| Acidification of Land & Water | kg SO _{2e} | 5.6E-03 |
| Eutrophication | kg PO _{4e3} | 1.2E-03 |
| Abiotic Depletion Fossil Fuel | MJ _{ncv} | 2.5 |
| Abiotic Depletion Mineral (Elemental) | kg Sb _{eq} | 2.7E-03 |

¹ ncv stands for net calorific value



Interpretation of Results Cradle to Gate

Components embodied 98% EE and 99% GWP mostly from supply chain fossil fuel. Per kg dispatched product packaging gross embodied energy (EE) input share was 2% and Global Warming (GWP) emissions share was 1%. Except for lowest impact minerals, component mass share correlated with gross EE and GWP/kg product.

On average, the Whitefield factory manufacturing used only 17% gross energy with 13% being electrical and 4% gas fuel with GWP emissions 12% and 5% shares respectively. While factory power supply is predominantly renewable all fuel was transported and most wood scrap fuel was shipped from North America.

Overall, of the gross product input 85% EE was fossil fuelled with 15% from renewable sources. On average 74% was fossil fuelled and 26% was feedstock that is recoverable at end of product life via material re-use or transformation to energy. Of gross, on average 59% EE was burnt as fossil fuels, 26% retained in fossil feedstock, 14% used as renewable energy and 1% retained in renewable feedstock. Of the gross primary non-renewable energy 69% was used as fuel and 31% was retained in feedstock. Of the gross renewable energy 95% was used and 5% retained in feedstock material.

References for this EPD

CML LCA methodology, Institute of Environmental Sciences (CML), Faculty of Science, University of Leiden, Netherlands

GreenTag[™] 2021 <http://www.globalgreentag.com/get-certified>

GreenTag[™] 2021 Product Category Rules <http://www.globalgreentag.com/greentag-epd-program>

International Energy Agency, Energy Statistics 2020 <http://www.iea.org>

ISO 14015:2001 EMS: Environmental assessment of sites & organizations (EASO)

ISO 14020:2000 Environmental labels & declarations — General principles

ISO 14025:2006 Environmental labelling & declarations Type III EPDs Principles & procedures

ISO 14031:1999 EM: Environmental performance evaluation: Guidelines

ISO 14040:2006 EM: Life cycle assessment (LCA): Principles & framework, London, BSI, 2006.

ISO 14044:2006 EM: LCA: Requirement & guideline LCI; LCIA Interpretation, London, BSI, 2006.

ISO 15392:2008 Sustainability in building construction General principles

ISO 15686-1:2011 Buildings & constructed assets - Service life planning - Part 1: General principles & framework

ISO 15686-2:2012 Buildings & constructed assets - Service life planning - Part 2: Service life prediction procedures

ISO 15686-8:2008 Buildings & constructed assets - Service-life planning - Part 8: Reference service life & service-life estimation

EN 15804:2012+A2:2019 Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products

ISO 21929-1:2011 Sustainability in building construction - Sustainability indicators - Part 1: Framework for the development of indicators and a core set of indicators for buildings

ISO 21930:2007 Sustainability in building construction - Environmental declaration of building products

ISO 21931-1:2010 Sustainability in building construction - Framework for methods of assessment of the environmental performance of construction works - Part 1: Buildings

ISO/TR 21932:2013 Sustainability in buildings and civil engineering works - A review of terminology