



Global GreenTag^{Cert}™ EPD Program

Compliant to EN 15804:2012+A1 2013



Polyflor Ltd

Wet Area Safety Flooring

Polysafe Quattro PUR

Leicester Rd, Whitefield, Manchester
M 45 7NG, United Kingdom





EPD Verification and LCA Details



| | |
|--------------------|----------------|
| EPD Scope | Cradle to Gate |
| EPD Number | PLF HW3 2021EP |
| Issue Date | 10 August 2021 |
| Valid Until | 10 August 2026 |



Demonstration of Verification

CEN standard EN 15804 serves as the core Product Category Rules (PCR)

Independent external verification of the declaration and data, according to ISO 14025:2010

| | | |
|--|--|--|
| <input checked="" type="checkbox"/> External |  10th Aug 2021 | Third Party Verifier ^a by Shloka Ashar, Sustainability Consultant |
| <input checked="" type="checkbox"/> Internal |  22/09/21 | LCA Reviewed by Shloka Ashar, Sustainability Consultant |
| | | EPD Reviewed by David Baggs, Global GreenTag Pty Ltd |

a: Optional for business-to-business communication; mandatory for business-to-consumer communication (see EN ISO 14025:2010, 9.4)

The EPD is property of declared manufacturer. Different program EPDs may not be comparable as e. g. Australian transport is often more than elsewhere. Comparability is further dependent on the product category rules used and the source of the data. Further explanatory information is found at info@globalgreentag.com or contact: certification1@globalgreentag.com.

This EPD discloses potential environmental outcomes compliant with EN 15804 for business-to-business communication.

LCIA results are relative expressions that do not predict impacts on category endpoints, exceeding of thresholds, safety margins or risks.

| EPD Program Operator | LCA and EPD Producer | Declaration Owner |
|---|--|--|
| Global GreenTag Pty Ltd PO Box 311 Cannon Hill, QLD 4170 Phone: +61 (0)7 33 999 686 http://www.globalgreentag.com | The Evah Institute Division of Ecquate Pty Ltd PO Box 123 Thirroul NSW Phone: +61 (0)7 5545 0998 http://www.evah.com.au/ | Polyflor Ltd PO Box 3, Radcliffe New Road Whitefield, Manchester M45 7NR UK Phone: + 0161 767 1111 http://www.polyflor.com |





Product Information

| | | | |
|---|---|--------------------------------|-----------------------------|
| Product name | Polyflor Wet-Area Safety flooring | | |
| Product codes | Polysafe Quattro PUR | | |
| Declared Unit | The declared product per kilogram | | |
| Product Specifications | Heterogeneous 2.0mm gauge flooring | | |
| Standards | EN 13845:2017 Resilient floor coverings - Polyvinyl chloride floor coverings with particle based enhanced slip resistance - Specification | | |
| Manufacture site | Polyflor Ltd., Leicester Rd, Whitefield, Manchester M 45 7NG, United Kingdom | | |
| Manufacture warranty | 10 years | | |
| Representation Site & Geography | United Kingdom, Pacific Rim and Australasia. | | |
| Functional & Technical Performance | Property | Conformance to Standard | Polysafe Quattro PUR |
| | Performance | EN 13845 | Conforms |
| | Reaction to Fire | EN 13501-1 Class | Bfl-S1 |
| | Use Area | EN 685/ISO 10874 | 23, 34 & 43 |
| | Slip Resistance | DIN 51130 | R11 |
| | VOC Emissions | Indoor Air Comfort | Eurofins Gold certified |
| | | AgBB/ABG | Pass |
| Data quality, range & variability | Cut-off criteria and data quality complies with EN 15804 Significant differences of average LCIA results are declared | | |
| Primary Data | Data was collected in accordance with EN ISO 14044:2006, 4.3.2, from primary sources including the manufacturer, suppliers and their publications on standards, locations, logistics, technology, market share, management systems and commitments to improved environmental performance. | | |
| No Chemicals of Very High Concern | Contains no substances in the "Authorised or Candidate Lists of Substances of Very High Concern (SVHCs)" with the European Chemicals Agency | | |



Information Modules

[illegible]

EPD15804EDPHomogeneousPolysafeWetQuattro@Evah9MMSH10Aug2021SA.docx



Base Material Origin and Detail

Table 1 lists product composition by function, component, source and mass share amount.

| Function | Component | Source | Polysafe Quattro PUR |
|----------------|-------------------------|------------|----------------------|
| Binder | PVC | EU | >40<45 |
| Filler | Dolomite | UK | >27<32 |
| Plasticiser | Diocetyl Terephthalate | Sth. Korea | >17<22 |
| Safety Grip | Coloured Quartz | Germany | >5<10 |
| Carrier | Fibreglass PVA Crenette | UK EU | >2<5 |
| Plasticiser | Epoxidised Esters | UK | >1<3 |
| Colour & white | PVC Chip | EU | >1.5<1.75 |
| Colour | Pigment Paste | UK | >0.5<2 |
| Filler | Recycled Glass | UK | >0.5<1 |
| Stabiliser | Barium Zinc Soap | UK | >0.3<0.8 |
| Coating | Polyurethane | UK | >0.1<0.5 |
| Fungicide | Proprietary | Global | <0.015 |



Scope and System Boundary

Figure 2 shows included processes in a cradle to gate system boundary and dashed lines defining excluded scenarios to end of life fate to recycling or to landfill grave.

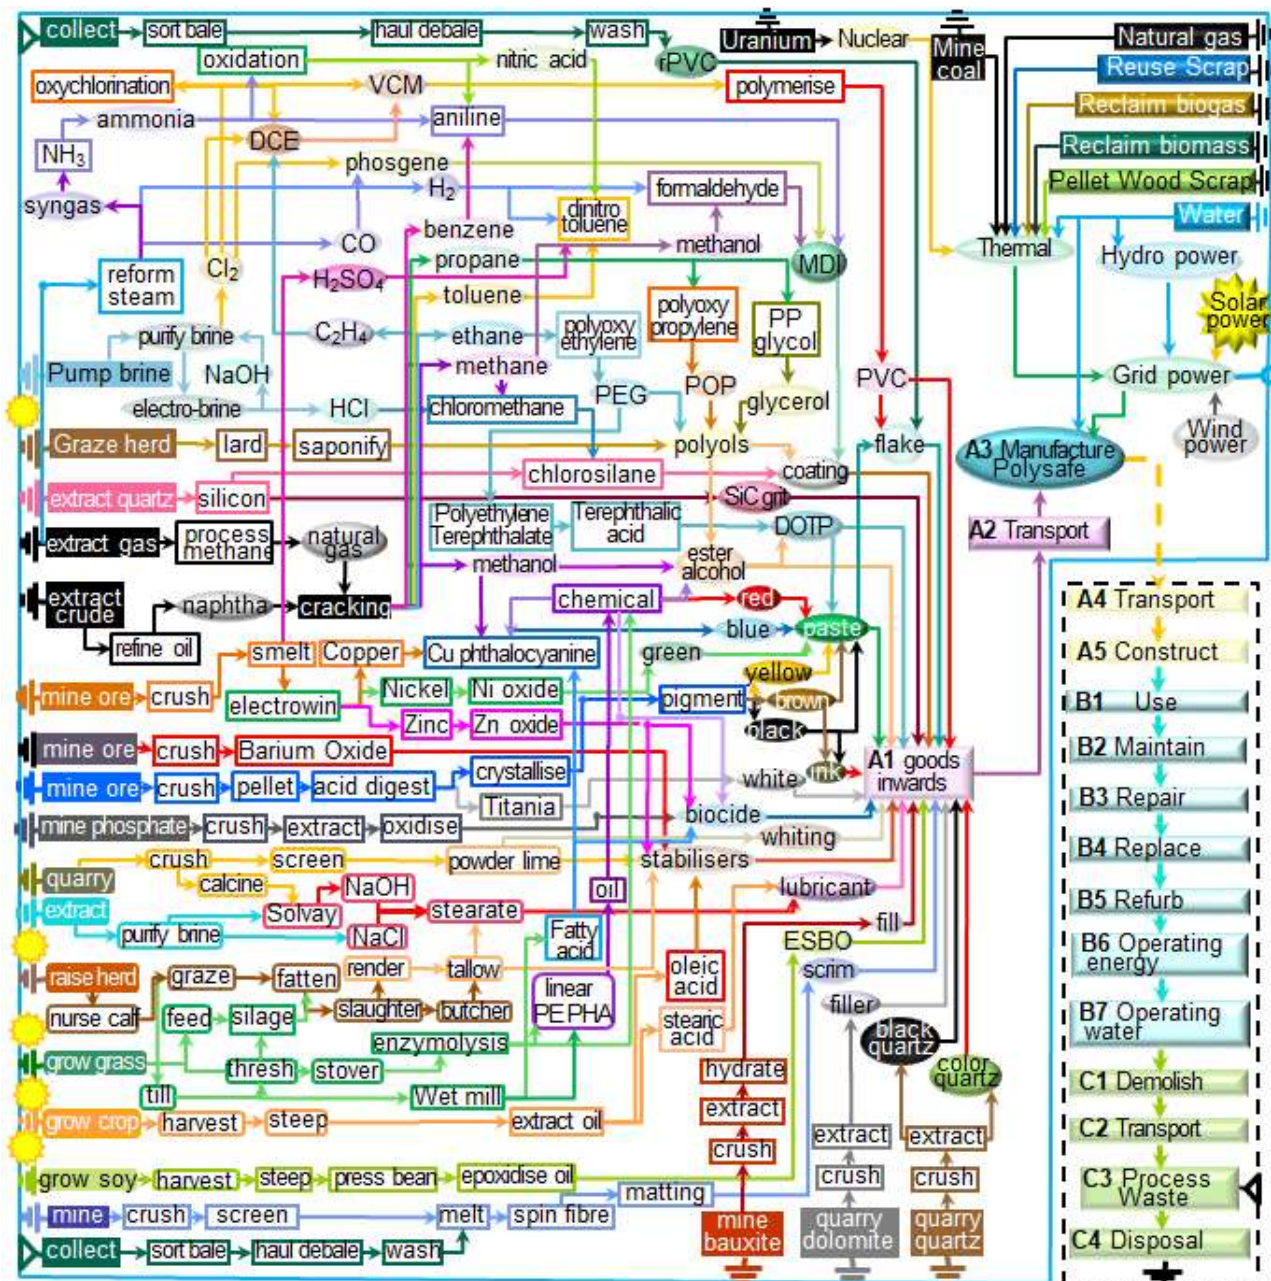


Figure 2 Process Flow Chart Cradle to Gate System Boundary



Environmental Impact Terminology

Environmental impacts contributing to risks of social and ecological issues and collapse are tabled below with **common names** and remedies given for each indicator listed in subsequent results tables.

| | |
|---|---|
| Global warming potential | Greenhouse gases absorb infra-red radiation. This heat reduces thermal energy differentials, from equator to poles, forcing ocean current and wind circulation to blend and regulate climate. Weakly blended “lumpier” weather has more frequent, extreme heat wave, wildfire, cyclone, storm, flood and blizzard events. Accumulation of carbon dioxide, natural gas methane, nitrous oxides and volatile organic compounds from burning fossil fuels causes global warming. Forest and wilderness growth absorbing air-borne carbon in biomass can drawdown such accumulation. Urgent renewable energy reliance is vital in time to avoid imminent tipping points and the worsening “ climate emergency ”. |
| Ozone depletion potential | Stratospheric ozone loss weakens the planet’s solar shield so more shorter wavelength ultraviolet (UVB) light reaching earth damages plants and increases malignant melanoma and skin cancer in humans and animals. Chlorofluorocarbons, hydrochlorofluorocarbons (HCFC), chlorobromomethane, hydrobromofluorocarbons, carbon tetrachloride, methyl chloroform, methyl bromide and halon gas cause ozone layer loss. To repair the “ ozone hole ” reliance on ozone-safe refrigerants, aerosols and solvents is essential to avoid further its depletion and enable accumulation of naturally-formed ozone |
| Acidification potential of land and water | Acidification reduces soil and waterway pH, impedes nitrogen fixation vital for plant growth and inhibits natural decomposition. It increases rates and incidence of fish kills, forest loss and deterioration of buildings and materials. Chief synthetic causes of “ acid rain ” are emissions of sulphur and nitrogen oxides, hydrochloric and hydrofluoric acids and ammonia from burning fossil fuels polluting rain and snow precipitation world-wide. |
| Eutrophication potential | Eutrophication from excessively high macronutrient levels added to natural waters promotes excessive plant growth that severely reduces oxygen, water and habitat security for aquatic and terrestrial life across related ecosystems. Chief synthetic cause of “ algal blooms ” is nitrogen (N, NO _x , NH ₄) and phosphorus (P, PO ₄ ³⁻) in rain run-off across over-fertilised land catchments. |
| Photochemical ozone creation potential | Tropospheric photochemical ozone, called “ smog ” near ground level, is created from natural and synthetic compounds in UV sunlight. Low concentration smog damages vegetation and crops. High concentration smog is hazardous to human health. Chief synthetic causes are nitrogen oxides, carbon monoxide and volatile organic compounds (VOC) pollutants. Avoiding reliance on dirtiest coal fuel and volatile chemicals has reduced smog incidence in many areas globally. |
| Abiotic depletion potential elemental | Abiotic depletion of finite mineral resources increases time, effort and money required to obtain more resources to the point of extinction of naturally viable reserves. This limits future accessibility to vital technical, medicinal and chemical resources. The youth movement “ extinction rebellion ” calls on adults to secure ore reserves, biodiversity and climate for current and future generations. |
| Abiotic depletion potential fossil fuel | Abiotic depletion of resources by consuming finite oil, natural gas, coal and nuclear fossil fuel reserves leaves current and future generations suffering limited available, accessible, plentiful, essential valuable as well as scarce raw material, medicinal, chemical, fuel and feedstock. Approaching “ peak oil ” acknowledges fossil fuel reserves are finite and the need for decision-makers to act to avoid market instability, insecurity and or oil and gas wars. |



Cradle to Gate Inventory and Potential Impact Results

Table 2 shows inputs, outputs and potential impacts in Megajoule (MJ) or kilogram (kg) units per declared unit.

Table 2 Resource Amounts A1-A3 /kg

| Inventory Input Categories | Unit | Polysafe Quattro PUR |
|--|-----------------------------------|----------------------|
| Net Fresh Water | m ³ | 0.30 |
| Secondary Material | kg | 5.8E-02 |
| Secondary Renewable Fuels | MJ _{ncv} | 0.0E+00 |
| Secondary Non-renewable Fuels | MJ _{ncv} | 0.3 |
| Primary Renewable Energy Not Feedstock | MJ _{ncv1} | 9.2 |
| Primary Renewable Feedstock Material Energy | MJ _{ncv} | 0.52 |
| Primary Renewable Energy Resources | MJ _{ncv} | 10 |
| Primary Non-renewable Energy Not Feedstock | MJ _{ncv} | 40 |
| Primary Non-renewable Feedstock Energy | MJ _{ncv} | 18 |
| Total Primary Non-renewable Energy Resources | MJ _{ncv} | 57 |
| Inventory Output Categories | | |
| Hazardous Waste Disposed | kg | 2.3E-03 |
| Non-hazardous Waste Disposed | kg | 0.36 |
| Radioactive Waste Disposed | kg | 8.3E-10 |
| Components for Reuse | kg | 0.27 |
| Material for Recycling | kg | 0.65 |
| Material for Energy Recovery | kg | 2.5E-03 |
| Exported Electrical Energy | MJ _{ncv} | 0.0E+00 |
| Exported Thermal Energy | MJ _{ncv} | 0.0E+00 |
| Potential Impact Categories | | |
| Global Warming | kg CO _{2e100} | 2.3 |
| Stratospheric Ozone Depletion | kg R11 _e | 9.2E-10 |
| Photochemical Ozone Creation | kg C ₂ H _{4e} | 8.7E-03 |
| Acidification of Land and Water | kg SO _{2e} | 6.2E-03 |
| Eutrophication | kg PO _{4e3} | 1.4E-03 |
| Abiotic Depletion Fossil Fuel | MJ _{ncv} | 2.7 |
| Abiotic Depletion Mineral (Elemental) | kg Sb _{eq} | 2.5E-03 |

¹ ncv stands for net calorific value



Interpretation of Results Cradle to Gate

The majority of impacts derive from the binder. Per kg dispatched product packaging gross embodied energy (EE) input share was 2% and Global Warming (GWP) emissions share was 1%. Components embodied 98% EE and 99% GWP mostly from supply chain fossil fuel. Overall alumina and dolomite mineral fill impacts were lowest.

Figure 3 shows, except for mineral fill, component mass share correlated with gross EE and GWP/kg product

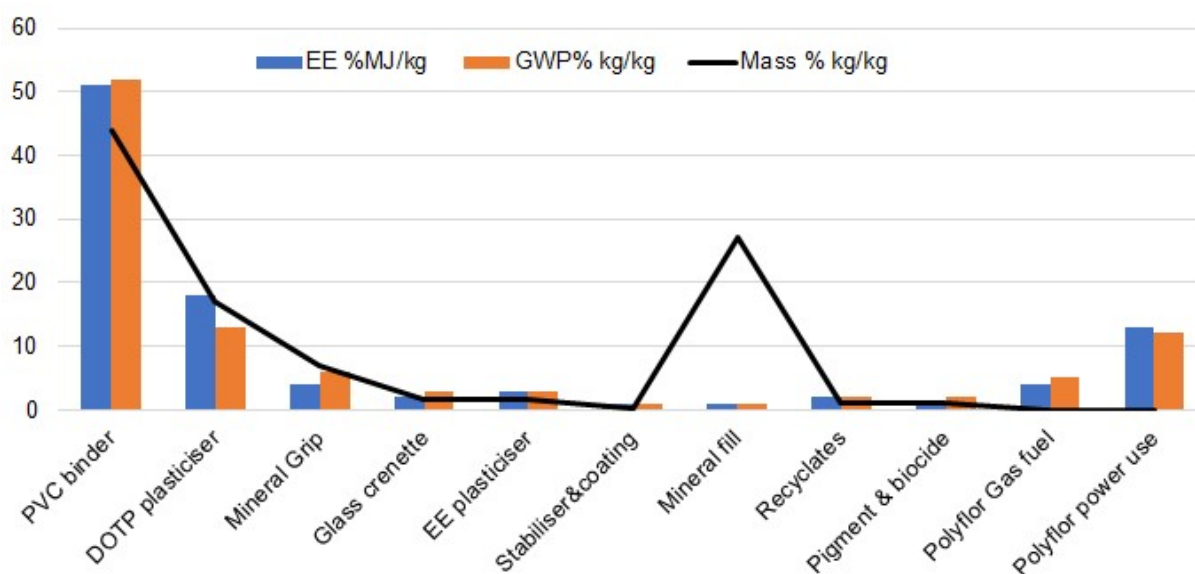


Figure 3 Inputs of Component Mass, Energy (EE) and GWP (CO_{2e})/kg product

Table 3 compares average gross EE and GWP shares/kg product. Apart from fill, component mass share correlates with EE share. On average, the Whitefield factory manufacturing used only 17% gross energy with 13% being electrical and 4% gas fuel with GWP emissions 12% and 5% shares respectively. While factory power supply is predominantly renewable all biomass fuel was transported and most wood scrap fuel was shipped from North America.

Table 3 shows component % share of product total/kg product

| Product name | Polysafe Quattro | |
|--------------------|------------------|------|
| Shares/kg product | EE% | GWP% |
| PVC binder | 53 | 55 |
| DOTP plasticiser | 19 | 14 |
| Polyflor power use | 13 | 12 |
| Polyflor Gas fuel | 4 | 5 |
| Glass Carrier | 3 | 4 |
| EHE plasticiser | 3 | 4 |

Overall, of the gross product input 85% EE was fossil fuelled and 15% from renewable sources. On average 74% was fossil fuelled and 26% feedstock that is recoverable at end of product life via material re-use or transformation to energy. Of gross, on average, 59% EE was burnt as fossil fuels, 26% retained in fossil feedstock, 14% used as renewable energy and 1% retained in renewable feedstock. Of the gross 58MJ primary non-renewable energy 69% was used as fuel and 31% was retained in feedstock. Of the gross 10MJ renewable energy 95% was used and 5% retained in feedstock material.



References for this EPD

BRE Global, BRE Environmental Profiles 2013: Product Category Rules for Type III EPD of construction products to EN 15804:2012+A1:2013. PN 514. Watford, BRE, 2014

CML LCIA Methodology, Institute of Environmental Sciences (CML), Faculty of Science, University of Leiden, Netherlands

GreenTag[™] 2021 <http://www.globalgreentag.com/get-certified>

GreenTag[™] 2021 Product Category Rules <http://www.globalgreentag.com/greentag-epd-program>

International Energy Agency, Energy Statistics 2021 <http://www.iea.org>

ISO 14015:2001 EMS: Environmental assessment of sites & organizations (EASO)

ISO 14020:2000 Environmental labels & declarations — General principles

ISO 14025:2006 Environmental labelling & declarations Type III EPDs Principles & procedures

ISO 14031:1999 EM: Environmental performance evaluation: Guidelines

ISO 14040:2006 EM: Life cycle assessment (LCA): Principles & framework, London, BSI, 2006

ISO 14044:2006 EM: LCA: Requirement & guideline LCI; LCIA Interpretation, London, BSI, 2006

ISO 15392:2008 Sustainability in building construction General principles

ISO 15686-1:2011 Buildings & constructed assets Service life planning Part 1: General principles

ISO 15686-2:2012 Buildings & constructed assets Service life (SL) planning Part 2: prediction

ISO 15686-8:2008 Buildings & constructed assets SL planning Part 8: Reference & estimation

ISO 21929-1:2011 Sustainability in building construction Sustainability indicators Part 1 Framework

ISO 21930:2007 Building construction: Sustainability, Environmental declaration of building products

ISO/TS 21931-1:2010 Sustainability in building construction: Framework for assessment, Part 1

ISO 21932:2013 Sustainability in buildings and civil engineering works -- A review of terminology

USGS 2021 United States Geological Survey, Mineral Commodity Summaries