

part of the group

CARPET III ES

Mat. Works is a Division of National Floorcoverings Ltd, the UK's leading manufacturer of commercial floor coverings.

Anthracite Light Grey Deep Blue

Looking for something different?

Mat. Works provides a host of product inserts in a variety of colours to suit any requirement.



MW Maxim Yellow and MW Maxim Anthracite (Safety Colour Inserts)



Premier Charcoal Inserts



TREADLOC 25

Description:

Treadloc 25 by Mat. Works is a revolutionary modular matting solution. Manufactured from nitrile rubber, the 25cm x 25cm tile may be small but packs an almighty punch when it comes to performance.

Specifically designed to withstand heavy footfall, Treadloc 25 will not expand, contract, fade or become brittle, nor will it bend or buckle under pressure making it an ideal heavy contract solution for entrance areas in every sector. Unlike aluminium solutions, Treadloc 25 can withstand slight undulations in the sub-floor, which are sometimes unavoidable, without compromising the strength and performance of the product.

with interlocking male and female components for ease of installation. The versatile tiles can be quarter-turned during installation to create a checkerboard effect allowing for multi-directional entrances. There is also the added benefit of being able to purchase individual Treadloc 25 tiles, meaning any damaged tiles can be replaced with ease.

Technical data:

Tile size mm Locking guides 250 mm x 250 mm x 12

Easy Inter-locking system as standard. Removable male and female connectors.

Composition

Nitrile rubber composition Nitrile rubber is resistant

Wear classification

Heavy contract class 33

Twice the weight of leading competitor products - twice the durability



Workspace Entrance Victor Inserts



Workspace Entrance Viscount Inserts



Workspace Entrance Vulcan Inserts



Workspace Entrance Vixen Inserts



Premier Dark Blue Inserts



Premier Mercury Inserts

Mat.Works provides a survey and installation service on all Treadlock 25 projects.

Treadloc 25 provides a flammability rating of Cfl-s2 (BS EN 14041:2004)





The nitrile rubber in Treadloc 25 is now manufactured with copper compounds, a material that has been proven to have anti-microbial properties, combating the spread of hospital-acquired infections, including MRSA.

The product has been tested to ISO 22196, which specifies a method of evaluating the antibacterial activity of antibacterial-treated plastics, and other non-porous surfaces of products.

The results showed that the copper in the Treadloc 25 killed 99.29% of MRSA Bacterium.



When examined under the Coefficient of Friction test (TRRL Pendulum test in accordance with BS 7976-2:200+A1:2013), Treadloc 25 has been proven to provide a low risk for slips in both dry and wet conditions.





No matwell or recess? No problem! Treadloc 25 has an optional click-fit ramping system...



Dimensions: W 125mm x H 125mm



Dimensions: W 66mm x L 2000mm x H 10mm



TREADLOC 25 RAMPING SOLUTION

Description:

Treadloc 25 can be surface-mounted, with the option of a heavy duty click-fit ramping system, making the product suitable for buildings without a matwell or recess.

The heavy-duty ramped edges allow wheeled and trolley access, as well as helping to prevent trip accidents. The system allows our popular used to create a 'surface matwell' where a mat is laid directly on top of the floor.

Key Features:


Ramping system to enable Treadloc 25 to be surface-mounted

Made from durable rubber


Pre-mitred corners for accuracy

Available in 2m lengths

Incorporate a colour of your choice into the ramp debris channel, for a striking and stand-out finish (as shown in the image on the left).

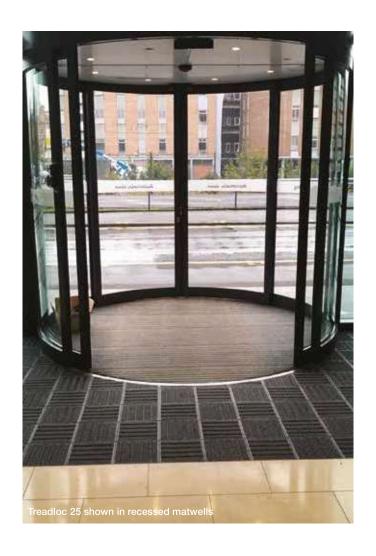



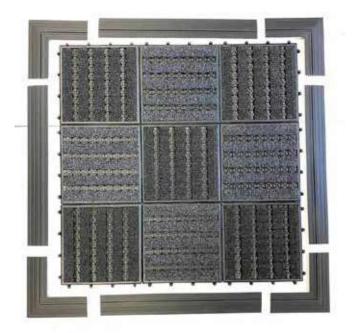



Treadloc 25 surface mounted with ramping solution





Commercial Entrance Matting
Health & Safety Specialists
ISO 14001 Accredited
ISO 9001:2000 Accredited

W: www.mat-works.co.uk

Marketing/Samples Department:

T: +44 (0) 1709 763 805 F: +44 (0) 1709 763 813