


**Mat.  
Works**  
ENTRANCE  
SOLUTIONS

# Entrance Matting


Primary and secondary  
matting solutions





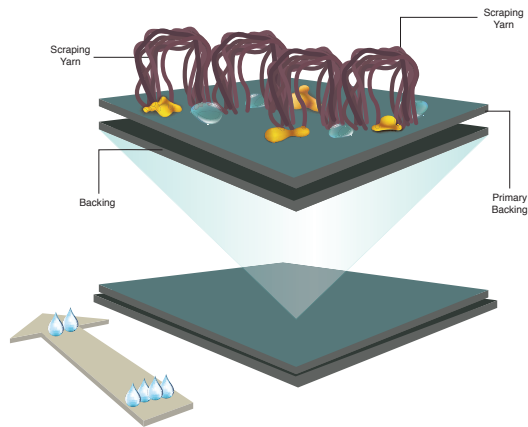

Brown

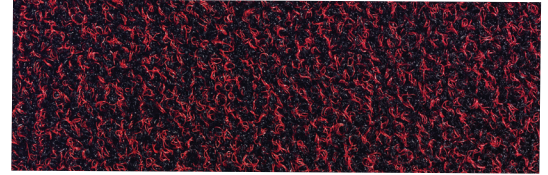

Red



Anthracite

# EXT MAT

## Description:

EXT MAT is a special outdoor mat that pairs scraping qualities with moisture absorption. The outdoor mat is available in three colours and suits every entrance.

EXT MAT is a robust mat that is ideal for heavy commercial use. It works best in entrance areas, stairwells, hospitality areas & lifts, for example, in commercial buildings and medium-sized and large offices.

EXT MAT stands out in terms of moisture absorption. Consequently, the mat is optimised for scraping. Small areas of dirt in the mat are not visible. This product can be used inside or outside and provides a durable solution in high traffic areas thanks to its Bouclé construction. The slightly blended design features coarse yarns only.

EXT MAT is a versatile outdoor mat fitting many different situations. This is down to its practical and versatile appeal. Even if the mat is used indoors it continues to perform to the highest standards by preventing dirt and moisture ingress reaching internal floors within a building.

## Technical data:

Pile material	100% Polyamide Backing PVC
Primary backing	nonwoven PET/PA Yarn
Construction	Bouclé
Pattern	Blended
Colours	3
Pile weight ISO 8543	± 600 g/m <sup>2</sup>
Total weight ISO 8543	± 3,000 g/m <sup>2</sup> pile
Height ISO 1766	± 6.5 mm
Total height ISO 1765	± 8.0 mm
Pile density ISO 8543	0.079 g/cm <sup>3</sup>
Number of stitches ISO 1763	± 64,500 /m <sup>2</sup>
Wearing class EN 1963	33
Comfort EN 1307	LC1
Suitability for stairs EN 1963	Intensive use
Suitability for castor chairs EN 985	Occasional use
Dimensional stability ISO 2551	<0.4%
Light fastness ISO 105 B02	>7
Water fastness ISO 105 B01	4 – 5
Rubbing fastness ISO 105 X12	4 – 5
Salt water ISO 105 E02	4 – 5
Shampoo BS 1006	4 – 5
Organic solvents ISO 105 X05	4 – 5
Absorption capacity TNO W6034	± 3.8 l/m <sup>2</sup>
Flammability	(BS6307) Methanamine Pill Test - Pass
BS EN13501	Cfl
Slip resistance EN13893	DS
Static charge ISO 6356	<0.1 kV
Roll widths	200 cm
Roll length	± 20 m

**Mat.  
Works**  
ENTRANCE  
SOLUTIONS



**To place your order**

+44 (0)1709 763839 | [sales@mat-works.co.uk](mailto:sales@mat-works.co.uk)

**More entrance matting solutions & samples**

[mat-works.co.uk](http://mat-works.co.uk) | [samples@mat-works.co.uk](mailto:samples@mat-works.co.uk)

**Mat.Works**

Farfield Park, Manvers,  
Wath-upon-Deane,  
Rotherham S63 5DB

